



The
PRIMO Collection
great quality, great value



MINIBAR SYSTEMS
smart bars • smart people • smart solutions



PRIMO 42D Drawer

PRIMO - great quality, great value

PRIMO minibars have been quality engineered – with generous internal space, simple and stylish design, **low energy consumption** and **silent absorption technology**. It's a great value for your hotel.



PRIMO 30 Glass Door



PRIMO 40 Aluminium Glass Door



PRIMO 60 Solid Door

Features

- Stocking capacity of up to 38 facings
- Adjustable transparent door racks for high visibility
- Removable shelving for easy cleaning
- Thermal insulation manufactured with cyclopentane
- Fully automatic defrost and easily adjustable thermostat
- Strong door hinges convertible left to right
- All-round magnetic seals to keep the door perfectly shut
- Integrated door handles
- Lock (can be deactivated)
- Internal LED lighting
- Low energy consumption
- Advanced silent absorption cooling technology

Technical Specifications

	PRIMO 30	PRIMO 40	PRIMO 60	PRIMO 42D
Capacity (liters / cubic feet)	29.3 / 1.03	35.4 / 1.25	43.9 / 1.55	42 / 1.48
Dimensions HxWxD (inches) HxWxD (mm)	20.5 x 15.8 x 16.7 520 x 400 x 425	20.5 x 15.8 x 18.7 520 x 400 x 475	20.7 x 18.98 x 18.3 526 x 482 x 465	16.5 x 21.75 x 19.5** 418 x 550 x 490
Door Options	Solid Black Door Glass Door Aluminium Glass Door	Solid Black Door Glass Door Aluminium Glass Door	Solid Black Door Aluminium Glass Door	Solid Drawer
Door Hinge	Universal	Universal	Universal	Drawer
Watts (W)	65	65	85	70
Voltage (V)	110V / 60Hz 220V / 50Hz	110V / 60Hz 220V / 50Hz	110V / 60Hz 220V / 50Hz	110V / 60Hz 220V / 50Hz
Amps	0.56	0.56	0.60	0.56
Energy Consumption (kWh/24h)*	0.80	.80	.90	.80
Net Weight (lbs) (kg)	31.6 - 39 14.3 - 17.7	33.5 - 41 15.2 - 18.5	37.2 - 45.1 16.8 - 20.4	50.4 22.8
Noise Level (dB)	0 dB	0 dB	0 dB	0 dB
Certification	CCC/CB/CETL/CE/GS/RoHS/UL/CSA/ISO 9001 2008/ISO 14001 2004			

No door racks available on glass doors.

*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371.

**Add 23 mm (0.91 inches) to the depth of the PRIMO 42D for handle.


Specifications may change without notice due to continuous product development.

www.MinibarSystems.com

DOC0181_PrimoCollection_US_Rev-4



MINIBAR SYSTEMS
smart bars · smart people · smart solutions

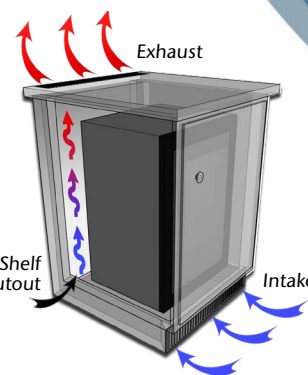

Ventilation

A minimum opening of 31 in² (200 cm²) for Intake, Shelf Cutout and Exhaust is required for proper ventilation.

Minibar North America
7340 Westmore Road
Rockville, MD 20850
tel 301 354 5055
fax 301 309 1115
info@MinibarSystems.com