

## Primo 40 Solid Black Door

Primo 40 minibars have been quality engineered with generous internal space, simple and stylish design, low energy consumption and silent absorption technology. It's a great value for your hotel.

### Standard Features

- Stocking capacity of up to 38 facings
- Adjustable transparent door racks for high visibility
- Racks mounted directly on the door to maximize revenue
- Removable shelving for easy cleaning
- Thermal insulation manufactured with cyclopentane
- Fully automatic defrost and easily adjustable thermostat
- Strong door hinge easily convert left to right
- All-round magnetic seals to keep the door perfectly shut
- Integrated door handle
- Lock (can be deactivated)
- Internal LED lighting
- Low energy consumption
- Advanced silent absorption cooling technology

### Technical Specifications

	Primo 40 SBD
Capacity (liters / cubic feet)	35.4L / 1.25Cu.Ft
Dimensions HxWxD (inches) (mm)	20.5 x 15.8 x 18.7 520 x 400 x 475
Door Options	Solid Black Door
Door Hinge	Universal
Shelves / Door Racks	1 / 2
Watts (W)	65
Voltage (V) / Frequency	110V / 60Hz 220V / 50Hz
Amps	0.56
Energy Consumption*	0.80 kWh/24 hr*
Gross Weight (lbs / kgs)	36.3 / 16.4
Net Weight (lbs / kgs)	33.5 / 15.2
Noise Level (dB)	0 dB
Certification	CCC/CB/CETL/CE/GS/RoHS/UL/CSA ISO 9001 2008/ISO 14001 2004

\*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371.




**Solid Black Door**



### Ventilation

A minimum opening of 31 in<sup>2</sup> (200 cm<sup>2</sup>) for Intake, Shelf Cutout and Exhaust is required for proper ventilation.

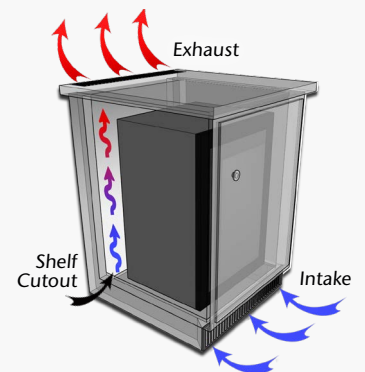

[www.MinibarSystems.com](http://www.MinibarSystems.com)

DOC0304\_Primo\_40\_Solid\_Black\_Door

**MINIBAR SYSTEMS**  
smart bars • smart people • smart solutions

Minibar North America  
7340 Westmore Road  
Rockville, MD 20850  
tel 301 354 5055  
fax 301 309 1115  
info@MinibarSystems.com