

Primo 60 Solid Black Door

Primo 60 minibars have been quality engineered with generous internal space, simple and stylish design, low energy consumption and silent absorption technology. It's a great value for your hotel.

Standard Features

- Stocking capacity of up to 38 facings
- Adjustable transparent door racks for high visibility
- Racks mounted directly on the door to maximize revenue
- Removable shelving for easy cleaning
- Thermal insulation manufactured with cyclopentane
- Fully automatic defrost and easily adjustable thermostat
- Strong door hinge easily convert left to right
- All-round magnetic seals to keep the door perfectly shut
- Integrated door handle
- Lock (can be deactivated)
- Internal LED lighting
- Low energy consumption
- Advanced silent absorption cooling technology

Technical Specifications

	Primo 60 SBD
Capacity (liters / cubic feet)	43.9L / 1.55Cu.Ft
Dimensions HxWxD (inches) (mm)	20.7 x 18.9 x 18.3 526 x 482 x 465
Door Options	Solid Black Door
Door Hinge	Universal
Shelves / Door Racks	1 / 2
Watts (W)	85
Voltage (V) / Frequency	110V / 60Hz 220V / 50Hz
Amps	0.60
Energy Consumption*	0.90 kWh/24 hr*
Gross Weight (lbs / kgs)	41.2 / 18.7
Net Weight (lbs / kgs)	37.2 / 16.8
Noise Level (dB)	0 dB
Certification	CCC/CB/CETL/CE/GS/RoHS/UL/CSA ISO 9001 2008/ISO 14001 2004

*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371.




Solid Black Door



Ventilation

A minimum opening of 31 in² (200 cm²) for Intake, Shelf Cutout and Exhaust is required for proper ventilation.

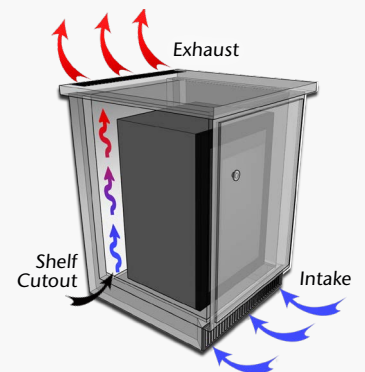

www.MinibarSystems.com

DOC0308_Primo_60_Solid_Black_Door

MINIBAR SYSTEMS
smart bars • smart people • smart solutions

Minibar North America
7340 Westmore Road
Rockville, MD 20850
tel 301 354 5055
fax 301 309 1115
info@MinibarSystems.com