

Thermoelectric Minibar - EMEA & ASIA

XC-30, XC-30A, XC-30AGD, XC-40, XC-40A, XC-40AGD, XC-60, XC-60AGD, XC-42D



Primo Thermo 30
solid black door



Primo Thermo 40
solid black door




Features

- Virtually silent thermoelectric cooling technology
- ADA compliant door
- Easily adjustable thermostat
- Removable cold cube wire racks for easy cleaning
- Thermal insulation manufactured using 100% environmental friendly cyclopentane
- Stainless steel die-cast cam lock
- Strong all-around magnetic door seals to keep the door tightly closed
- Reversible door hinge
- Internal intelligent LED lighting
- Fully automatic defrost



Adjustable Mechanical Thermostat

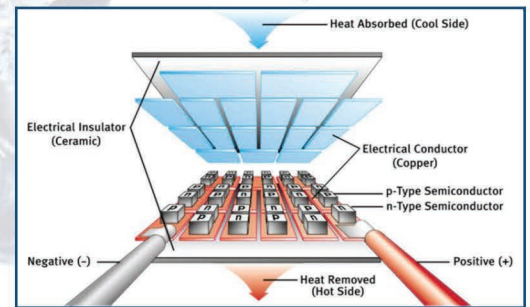

Peltier Superconductor Cooling Technology

Technical Specifications

| | Primo Thermoelectric 30 | Primo Thermoelectric 40 |
|---|--|--|
| Model Numbers | PT-NFP-30 | PT-NFP-40 |
| ERP Rating | G | G |
| Capacity (liters / cubic feet) | 26L / 0.92ft ³ | 38L / 1.34ft ³ |
| Dimensions HxWxD (inches) HxWxD (mm) | 18.82 x 14.96 x 15.35 478 x 380 x 390 | 20.08 x 16.93 x 16.14 510 x 430 x 410 |
| Watts (W) | 60-75W | 60-75W |
| Voltage (V) | 110V / 50-60Hz 220V / 50-60Hz | 110V / 50-60Hz 220V / 50-60Hz |
| Energy Consumption (kWh/24h) * | 0.37 kWh/24h * | 0.37 kWh/24h * |
| Net Weight (kgs / lbs) | 8.3 kgs / 18.3 lbs | 10.2 kgs / 22.5 lbs |
| Noise Level (dB) | <26 dB | <26 dB |
| Certification | UL/G-Mark/CB/EAC/GS-Mark/NOM | |

*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371

Specifications may change without notice due to continuous product development.