

Primo Absorption Minibar - Solid Door

XC-EA-27, XC-EA-30, XC-EA-40

**MB UK
SPECIFICATION SHEET 1**



Features


- Silent absorption cooling technology
- ADA compliant door
- Easily adjustable mechanical thermostat
- Removable cold cube wire racks for easy cleaning
- Door racks for maximum product merchandising
- Thermal insulation manufactured using 100% environmental friendly cyclopentane
- Stainless steel die-cast snap lock
- Strong all-around magnetic door seals to keep the door tightly closed
- Reversible door hinge
- Internal intelligent LED lighting
- Fully automatic defrost



Adjustable Mechanical Thermostat



27L Door Rail

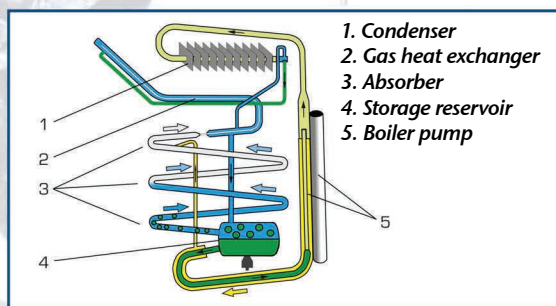

Absorption Cooling Technology

Technical Specifications

	Primo 27 Absorption	Primo 30 Absorption	Primo 40 Absorption
Model Numbers	XC-EA-27	XC-EA-30	XC-EA-40
ERP Rating	G	G	G
Capacity (liters / cubic feet)	21L / 0.74ft ³	26L / 0.91ft ³	33L / 1.16ft ³
Dimensions HxWxD (inches) HxWxD (mm)	20.16 x 15.12 x 16.65 512 x 384 x 423	20.16 x 16.5 x 16.65 512 x 419 x 423	22.28 x 17.36 x 17.99 566 x 441 x 457
Watts (W)	60-75W	60-75W	60-75W
Voltage (V)	110V / 50-60Hz 220V / 50-60Hz	110V / 50-60Hz 220V / 50-60Hz	110V / 50-60Hz 220V / 50-60Hz
Energy Consumption (kWh/24h) *	0.66 kWh/24h *	0.75 kWh/24h *	0.629 kWh/24h *
Net Weight (kgs / lbs)	12.25kgs / 27lbs	11.1kgs / 24.47lbs	12.3kgs / 27.12lbs
Noise Level (dB)	23 dB	23 dB	23 dB
Certification	UL/G-Mark/CB/EAC/GS-Mark/NOM		

*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371
Specifications may change without notice due to continuous product development.

