

# Primo Thermoelectric Minibar - Solid Door

PT-NFP-30, PT-NFP-40

**MB UK  
SPECIFICATION SHEET**




## Features

- Virtually silent thermoelectric cooling technology
- ADA compliant door
- Easily adjustable thermostat
- Removable cold cube wire racks for easy cleaning
- Thermal insulation manufactured using 100% environmental friendly cyclopentane
- Stainless steel die-cast cam lock
- Strong all-around magnetic door seals to keep the door tightly closed
- Reversible door hinge
- Internal intelligent LED lighting
- Fully automatic defrost



Adjustable Mechanical Thermostat

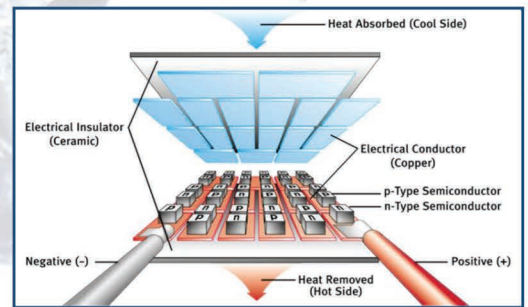

Peltier Superconductor Cooling Technology

## Technical Specifications

	Primo 30 Thermoelectric	Primo 40 Thermoelectric
Model Numbers	PT-NFP-30	PT-NFP-40
ERP Rating	G	G
Capacity (liters / cubic feet)	26L / 0.92ft <sup>3</sup>	38L / 1.34ft <sup>3</sup>
Dimensions HxWxD (inches) HxWxD (mm)	18.82 x 14.96 x 15.35 478 x 380 x 390	20.08 x 16.93 x 16.14 510 x 430 x 410
Watts (W)	60-75W	60-75W
Voltage (V)	110V / 50-60Hz 220V / 50-60Hz	110V / 50-60Hz 220V / 50-60Hz
Energy Consumption (kWh/24h) *	0.37 kWh/24h *	0.37 kWh/24h *
Net Weight (kgs / lbs)	8.3 kgs / 18.3 lbs	10.2 kgs / 22.5 lbs
Noise Level (dB)	26 dB	26 dB
Certification	UL/G-Mark/CB/EAC/GS-Mark/NOM	

\*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371

Specifications may change without notice due to continuous product development.

