

Primo Thermoelectric Drawer Minibar


PT-40NFD

**MB UK
SPECIFICATION SHEET 4**



Features

- Virtually silent thermoelectric cooling technology
- ADA compliant door
- Easily adjustable multi-stage Logic Thermostat
- Removable cold cube wire racks for easy cleaning
- Thermal insulation manufactured using 100% environmental friendly cyclopentane
- Stainless steel die-cast cam lock
- Strong all-around magnetic door seals to keep the door tightly closed
- Built in integrated door handle
- Internal intelligent LED lighting
- Fully automatic defrost
- Optional front wood panel installation

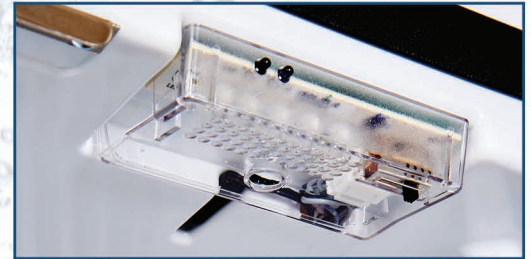

Multi-Stage Adjustable Thermostat



Technical Specifications

	Thermoelectric Drawer
Model Numbers	PT-40NFD
ERP Rating	G
Capacity (liters / cubic feet)	41L / 1.45ft ³
Dimensions HxWxD (inches) HxWxD (mm)	16.42 x 21.61 x 19.02 417 x 549 x 483
Watts (W)	60
Voltage (V)	110V / 50-60Hz 220V / 50-60Hz
Energy Consumption (kWh/24h)*	0.37 kWh/24h*
Net Weight (kgs / lbs)	15.7kgs / 34.61lbs
Noise Level (dB)	23 dB
Certification	UL/G-Mark/CB/EAC/GS-Mark/NOM

*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371

Specifications may change without notice due to continuous product development.

Ventilation

A minimum opening of 200 cm² for Intake, Shelf Cutout and Exhaust is required for proper ventilation.

