

# Primo Thermoelectric Minibar - Glass Door

PT-30A, PT-30AGD, PT-40A, PT-40AGD

**MB UK  
SPECIFICATION SHEET**




## Features

- Virtually silent thermoelectric cooling technology
- ADA compliant door
- Easily adjustable multi-stage Logic Thermostat
- Removable cold cube wire racks for easy cleaning
- Thermal insulation manufactured using 100% environmental friendly cyclopentane
- Stainless steel die-cast cam lock
- Strong all-around magnetic door seals to keep the door tightly closed
- Reversible door hinge
- Internal intelligent LED lighting
- Fully automatic defrost



Multi-Stage Adjustable Thermostat

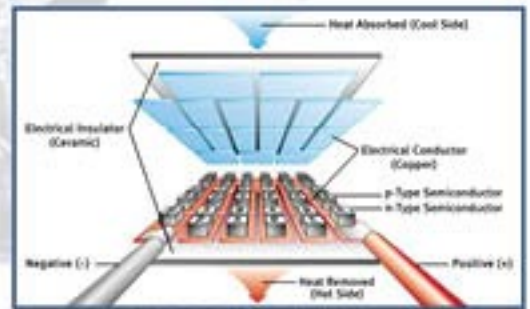

Peltier Superconductor Cooling Technology

## Technical Specifications

	Primo 30 Thermoelectric	Primo 40 Thermoelectric
Model Numbers: Black Frame Glass Door Painted Aluminium Frame Glass Door	PT-30A PT-30AGD	PT-40A PT-40AGD
ERP Rating	F	F
Capacity (liters / cubic feet)	23L / 0.81ft <sup>3</sup>	26L / 0.91ft <sup>3</sup>
Dimensions HxWxD (inches) HxWxD (mm)	20.16 x 15.12 x 15.71 512 x 384 x 399	20.16 x 16.5 x 15.63 512 x 419 x 397
Watts (W)	60-75W	60-75W
Voltage (V)	110V / 50-60Hz 220V / 50-60Hz	110V / 50-60Hz 220V / 50-60Hz
Energy Consumption (kWh/24h)*	0.252 kWh/24h*	0.251 kWh/24h*
Net Weight (kgs / lbs)	10.8kgs / 23.8lbs	11kgs / 24.25lbs
Noise Level (dB)	23 dB	23 dB
Certification	UL/G-Mark/CB/EAC/GS-Mark/NOM	

\*Average energy consumption per 24 hours, at 25°C (77°F) ambient temperature and 7°C (44.6°F) cooling temperature, in compliance with EN ISO 7371 Specifications may change without notice due to continuous product development.

